



NL-N Round profile clamp

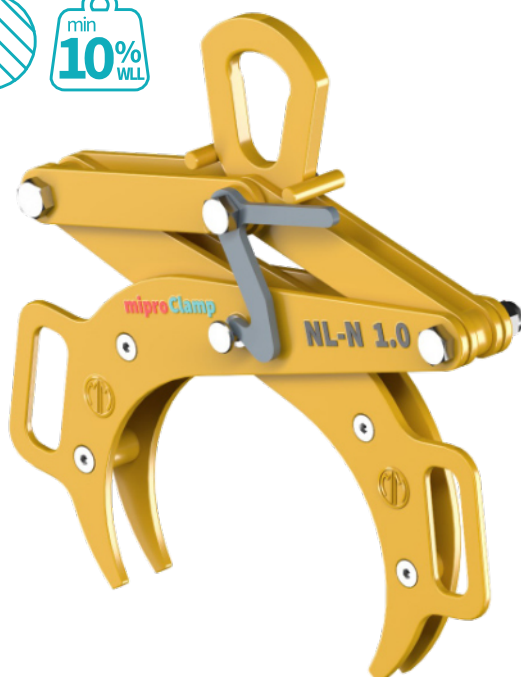

Declaration of conformity
 2006/42/EC manufactured according to Directive
 EN 13155 meets the Standard
 -20 +100°C working temperature
 16 000 max. working cycles
 strength test 100% according to PN-EN 13155
 Made in EU

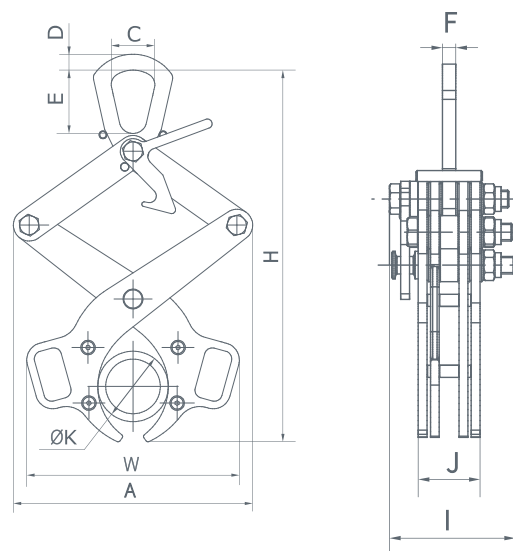


Code	WLL [kg]	Gripping range ØK [mm]	A	W	Dimensions [mm]							Mass [kg]
NL-N 0.5	500	88,9 - 150	302 - 344	268 - 303	55	20	80	377 - 469	114	56	12	9
NL-N 1.0	1 000	139,7 - 273	420 - 501	416 - 507	70	30	100	587 - 751	131	59	15	19

NL-O Round profile clamp with lining



Lining made of polyurethane

Declaration of conformity
 2006/42/EC manufactured according to Directive
 EN 13155 meets the Standard
 -20 +60°C working temperature
 16 000 max. working cycles
 strength test 100% according to PN-EN 13155
 Made in EU

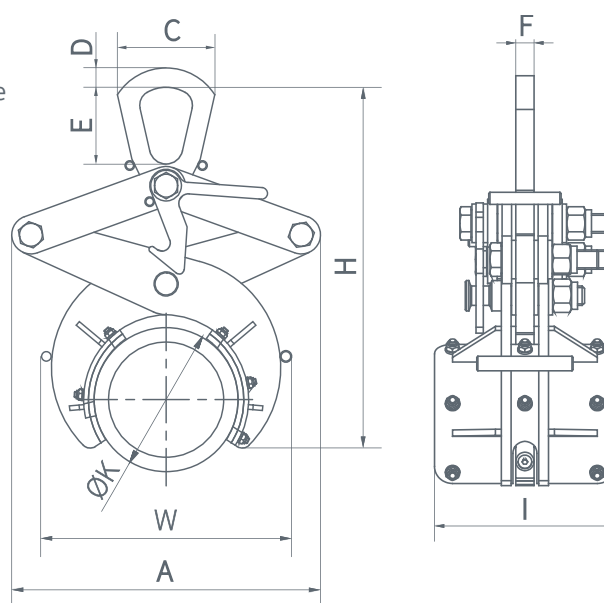

Code	WLL [kg]	Gripping range ØK [mm]	A	W	Dimensions [mm]							Mass [kg]
NL-O 0.5	500	88,9 - 150	287 - 322	215 - 262	55	20	80	376 - 459	150	15	11	11
NL-O 1.0	1 000	139,7 - 273	483 - 576	354 - 459	70	30	100	625 - 815	50	15	23	23