


NL-RO Round profile clamp



 Declaration of conformity
 2006/42/EC manufactured according to Directive
 EN 13155 meets the Standard
 -20 +60°C working temperature
 16 000 max. working cycles
 100% strength test according to PN-EN 13155
 Made in EU

Lining made of polyurethane

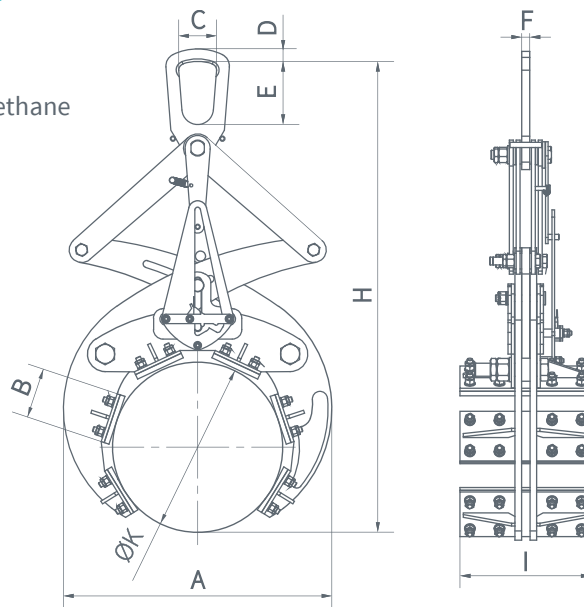


Code	WLL [kg]	Gripping range ØK [mm]	Dimensions [mm]								Mass [kg]
			A	H	B	C	D	E	I	F	
NL-RO 0.6	600	270 - 300	426 - 446	720 - 747	80	60	25	100	200	12	26

NL-T Pipe clamp



 Declaration of conformity
 2006/42/EC manufactured according to Directive
 EN 13155 meets the Standard
 -20 +60°C working temperature
 16 000 max. working cycles
 100% strength test according to PN-EN 13155
 Made in EU

Lining made of polyurethane

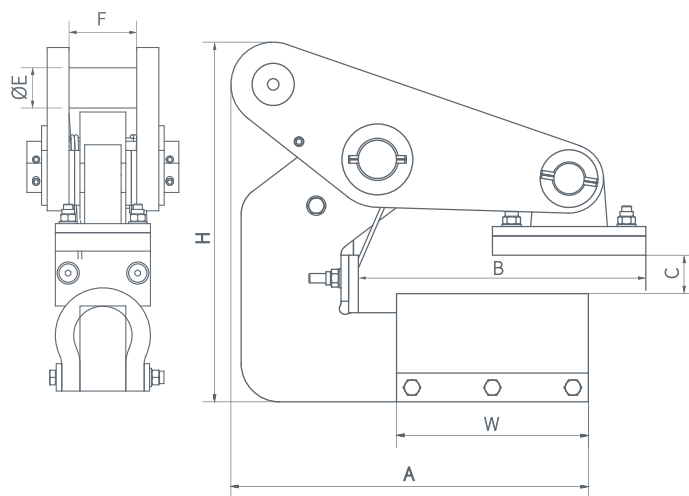

The clamps are equipped with a pressure spring that allows initial fixing on the load

The clamps are designed to work in pairs

Code	WLL/pair [kg]	Gripping range C [mm]	Dimensions [mm]							Mass [kg]
			A	W	H	B	ØE	F		
NL-T 1.0	1 000	0 - 10	175	100	170	150	16	27	3	
NL-T 2.0	2 000	0 - 10	186	100	188	150	22	37	6	