


NL Round profile clamp




2006/42/EC
manufactured according to Directive

EN 13155
meets the Standard

-20 +100°C
working temperature


16 000 max. working cycles
100% strength test according to PN-EN 13155

Made in EU

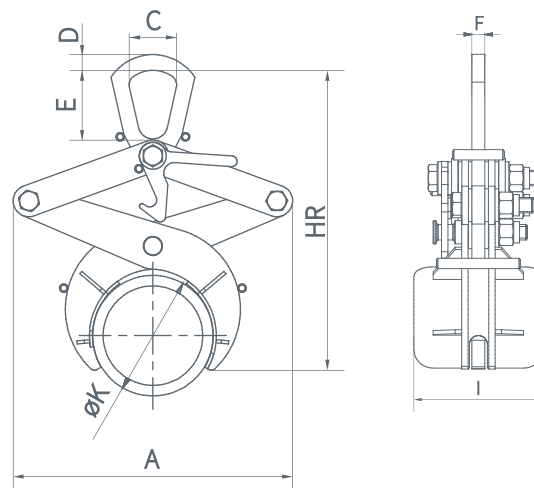

Code	WLL [kg]	Gripping range ØK [mm]	HR	Dimensions [mm]						Mass [kg]
				A	C	D	E	F	I	
NL 0.2	200	48,3 - 114,3	284 - 377	217 - 265	55	15	65	10	100	3,6
NL 0.5	500	88,9 - 150,0	369 - 452	286 - 322	55	20	80	15	150	10
NL 1.0	1 000	139,7 - 273,0	618 - 806	484 - 577	70	30	100	15	175	25
NL 2.0	2 000	244,5 - 323,9	725 - 843	627 - 671	85	30	125	20	200	42
NL 3.0	3 000	323,9 - 508,0	1059 - 1327	905 - 1020	90	35	140	25	250	105

NL-A Rectangular profile clamp

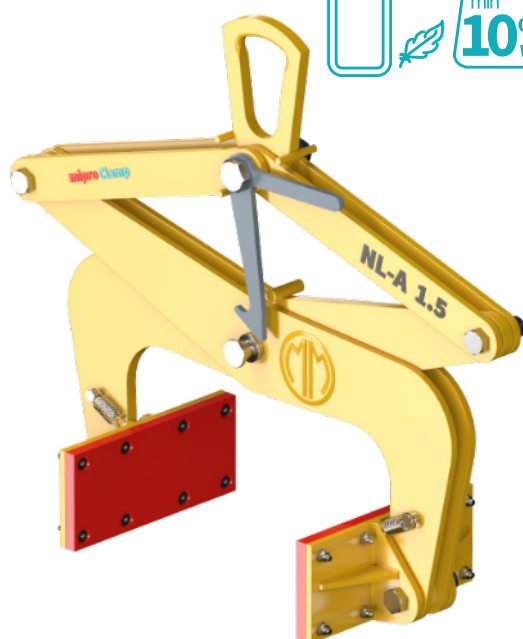


2006/42/EC
manufactured according to Directive

EN 13155
meets the Standard

-20 +60°C
working temperature

16 000 max. working cycles
100% strength test according to PN-EN 13155

Made in EU

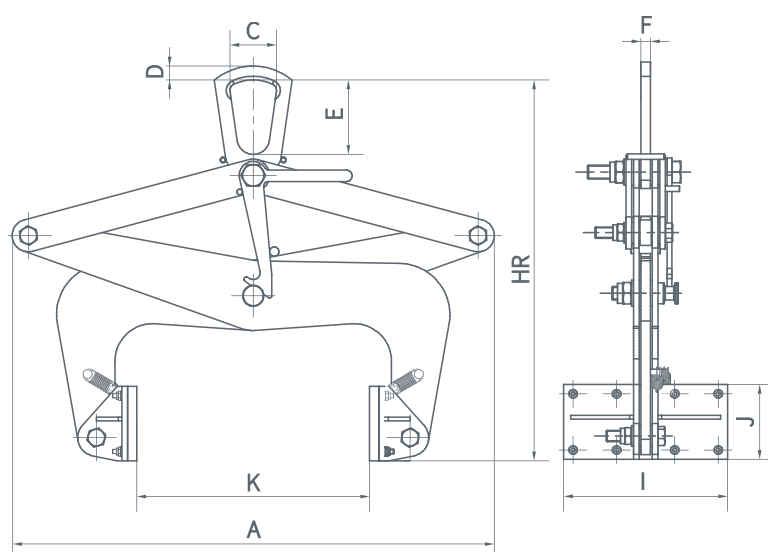

- Minimum jaw-load friction coefficient is 0.6
- Lining made of polyurethane

Code	WLL [kg]	Gripping range K [mm]	HR	A	C	D	E	F	I	J	Mass [kg]
NL-A 0.5	500	40 - 150	506	720	456	583	50	20	80	15	1750
NL-A 1.0	1 000	50 - 250	588	989	571	802	70	30	100	20	330
NL-A 1.5	1500	250 - 500	819 - 1231	889 - 1035	100	30	160	20	350	160	92
NL-A 2.5	2 500	470 - 750	951 - 1431	1011 - 1104	100	30	160	25	350	160	112