

TPK-A Lifting beam for cargo container


CE Declaration of conformity 2006/42/EC Made in EU
20 000 max. no. of work cycles endurance test 100% according to EN 13155 EN 13155 meets the Standard



Top mounting

- eye welded to the supporting beam
- rounded working edges
- strengthening ribs



- Has a rating plate with: manufacturer's mark, CE mark, lifting capacity, factory number, year of production, size and weight
- Fixed working spacing
- Lifting beam sold with four single-leg chain or steel rope slings with KE-type hooks

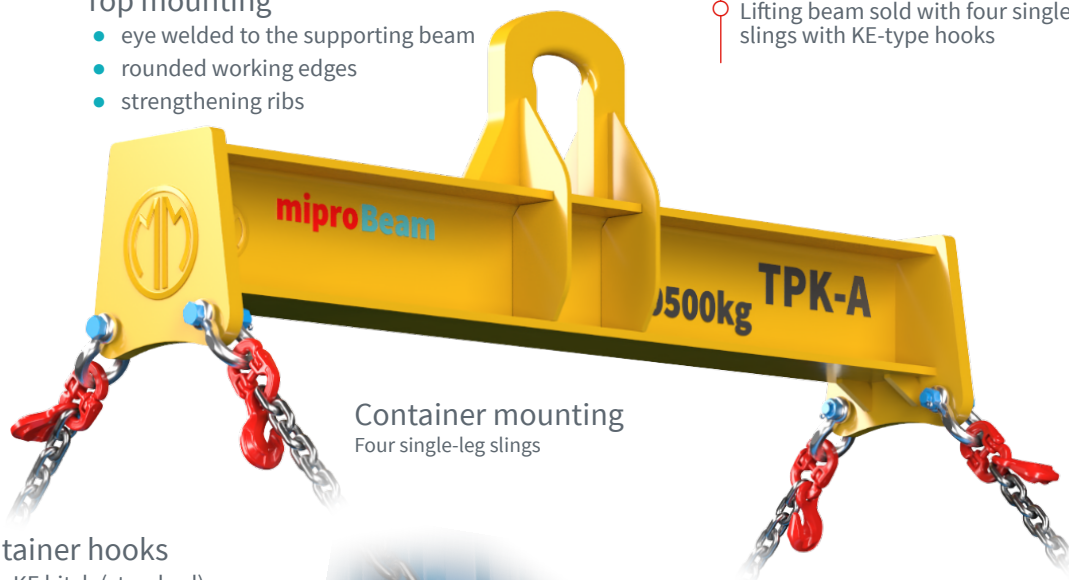

Container mounting
Four single-leg slings

Container hooks

- 4x KE hitch (standard)
- 4x CHWP type hook with protection against falling out (option)

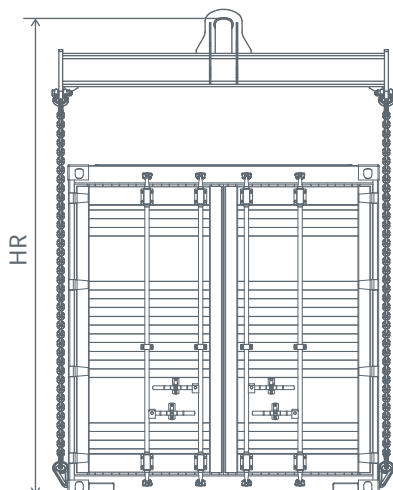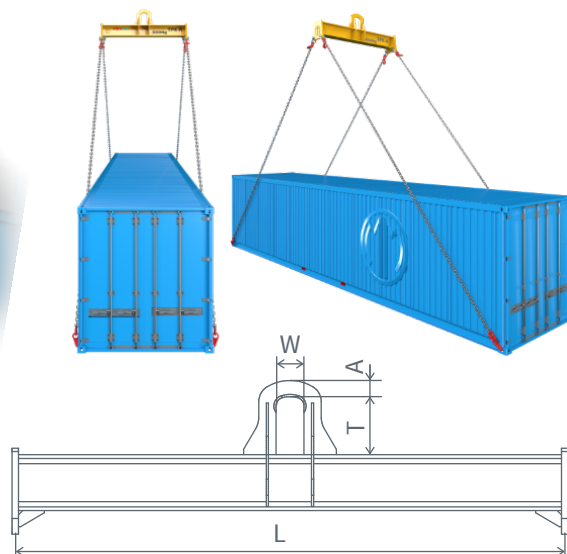

Code	WLL [kg]	container	sling type	L [mm]	T [mm]	W [mm]	A [mm]	B [mm]	HR [mm]	Mass [kg]
TPK-A 16-20 RS	16 000	20'/20'HC	wirerope sling	2 550	270	130	75	40	3 800	436
TPK-A 16-20 CS	16 000	20'/20'HC	chain sling	2 550	270	130	75	40	3 800	475
TPK-A 16-40 RS	16 000	40'/40'HC	wirerope sling	2 550	270	130	75	40	7 100	473
TPK-A 16-40 CS	16 000	40'/40'HC	chain sling	2 550	270	130	75	40	7 100	566
TPK-A 16-20/40 CS	16 000	40' i 20'	chain sling	2 550	270	130	75	40	7 100	575
TPK-A 24-20 RS	24 000	20'/20'HC	wirerope sling	2 550	350	150	90	50	3 900	605
TPK-A 24-20 CS	24 000	20'/20'HC	chain sling	2 550	350	150	90	50	3 900	597
TPK-A 24-40 RS	24 000	40'/40'HC	wirerope sling	2 550	350	150	90	50	7 200	670
TPK-A 24-40 CS	24 000	40'/40'HC	chain sling	2 550	350	150	90	50	7 200	673
TPK-A 24-20/40 CS	24 000	40' i 20'	chain sling	2 550	350	150	90	50	7 200	682
TPK-A 30.5-20 RS	30 500	20'/20'HC	wirerope sling	2 550	370	200	105	60	4 100	780
TPK-A 30.5-20 CS	30 500	20'/20'HC	chain sling	2 550	370	200	105	60	4 100	745
TPK-A 30.5-40 RS	30 500	40'/40'HC	steel rope	2 550	370	200	105	60	7 300	850
TPK-A 30.5-40 CS	30 500	40'/40'HC	chain sling	2 550	370	200	105	60	7 300	878
TPK-A 30.5-20/40 CS	30 500	40' i 20'	chain sling	2 550	370	200	105	60	7 300	895