

## TPK-B Spreader beam for cargo container

CE Declaration of conformity  
20 000 max. no. of work cycles  
2006/42/EC manufactured according to Directive  
endurance test 100% according to EN 13155  
Made in EU  
EN 13155 meets the Standard



16-30,5 t



- Has a rating plate with: manufacturer's mark, CE mark, lifting capacity, factory number, year of production, size and weight
- Fixed working spacing
- Lifting beam sold with four single-leg chain or steel rope slings with KE-type hooks

### Top mounting

- 2-leg chain or steel rope sling with a link



### Container mounting

Four single-leg slings chain or steel rope



### Container hooks

- 4x KE hitch (standard)
- 4x CHWP type hook with protection against falling out (option)

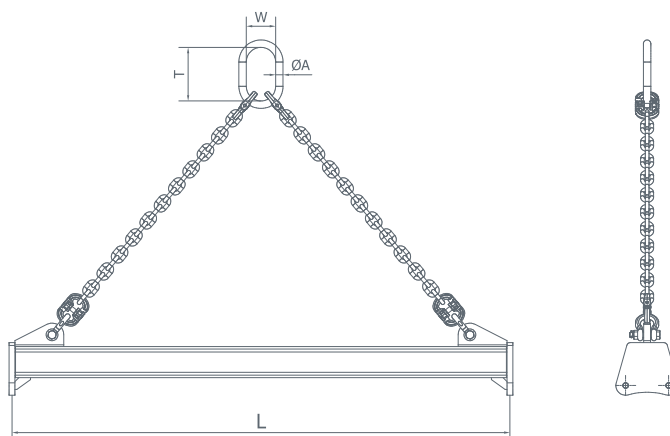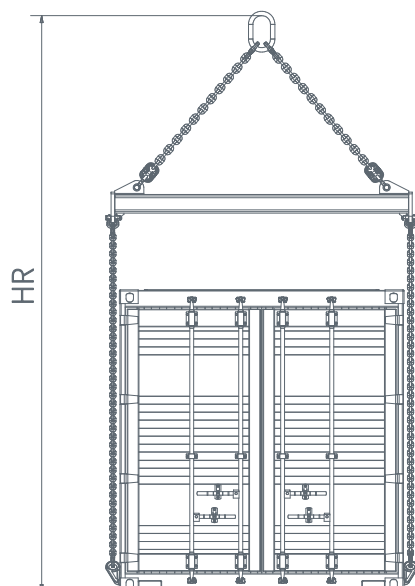

| Code                | WLL [kg] | container | sling type     | L [mm] | T [mm] | W [mm] | A [mm] | HR [mm] | Mass [kg] |
|---------------------|----------|-----------|----------------|--------|--------|--------|--------|---------|-----------|
| TPK-B 16-20 RS      | 16 000   | 20'/20'HC | wirerope sling | 2 550  | 275    | 150    | 38     | 4 700   | 345       |
| TPK-B 16-20 CS      | 16 000   | 20'/20'HC | chain sling    | 2 550  | 275    | 150    | 38     | 4 700   | 320       |
| TPK-B 16-40 RS      | 16 000   | 40'/40'HC | wirerope sling | 2 550  | 275    | 150    | 38     | 7 800   | 390       |
| TPK-B 16-40 CS      | 16 000   | 40'/40'HC | chain sling    | 2 550  | 275    | 150    | 38     | 7 800   | 406       |
| TPK-B 16 CS         | 16 000   | 40' i 20' | chain sling    | 2 550  | 275    | 150    | 38     | 7 800   | 415       |
| TPK-B 24-20 RS      | 24 000   | 20'/20'HC | wirerope sling | 2 550  | 260    | 140    | 36     | 4 900   | 560       |
| TPK-B 24-20 CS      | 24 000   | 20'/20'HC | chain sling    | 2 550  | 260    | 140    | 36     | 4 900   | 425       |
| TPK-B 24-40 RS      | 24 000   | 40'/40'HC | wirerope sling | 2 550  | 260    | 140    | 36     | 7 900   | 630       |
| TPK-B 24-40 CS      | 24 000   | 40'/40'HC | chain sling    | 2 550  | 260    | 140    | 36     | 7 900   | 500       |
| TPK-B 24-20/40 CS   | 24 000   | 40' i 20' | łańcuchowe     | 2 550  | 260    | 140    | 36     | 7 900   | 510       |
| TPK-B 30.5-20 RS    | 30 500   | 20'/20'HC | wirerope sling | 2 550  | 350    | 190    | 50     | 5 000   | 740       |
| TPK-B 30.5-20 CS    | 30 500   | 20'/20'HC | chain sling    | 2 550  | 350    | 190    | 50     | 5 000   | 600       |
| TPK-B 30.5-40 RS    | 30 500   | 40'/40'HC | wirerope sling | 2 550  | 350    | 190    | 50     | 8 000   | 815       |
| TPK-B 30.5-40 CS    | 30 500   | 40'/40'HC | chain sling    | 2 550  | 350    | 190    | 50     | 8 000   | 753       |
| TPK-B 30.5-20/40 CS | 30 500   | 40' i 20' | chain sling    | 2 550  | 350    | 190    | 50     | 8 000   | 770       |