

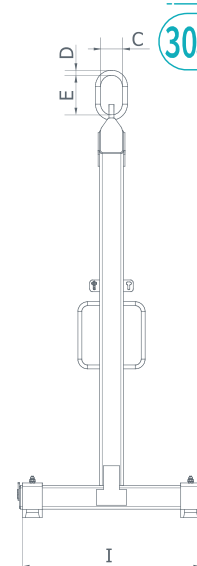


ES Crane fork

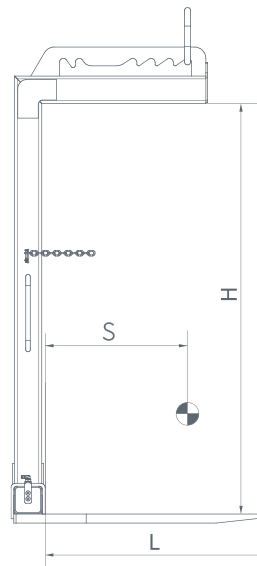

- Maximum offset of the load center of gravity 500 mm

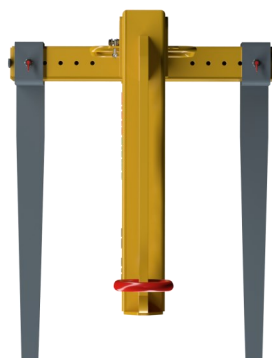

CE Declaration of conformity

2006/42/EC manufactured according to Directive

EN 13155 meets the Standard

-20 +100°C working temperature

16 000 max. working cycles

strength test 100% according to PN-EN 13155



Made in EU

24h INSTOCK Program



30 days

CODE	WLL [kg]	H	L	I	S	C	øD	E	Fork cross-section	Mass [kg]
ES 1.5	1 500	1 752	980	450 - 900	500	110	26	200	100 x 35	152
ES 2.0 *	2 000	1 802	980	450 - 900	500	110	26	200	100 x 40	165
ES 3.0	3 000	1 852	980	450 - 900	500	110	26	200	120 x 45	215

ES-A Crane fork

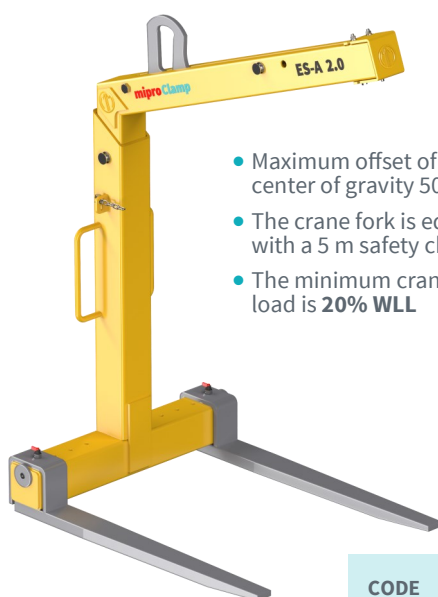

- Maximum offset of the load center of gravity 500 mm
- The crane fork is equipped with a 5 m safety chain
- The minimum crane fork load is 20% WLL

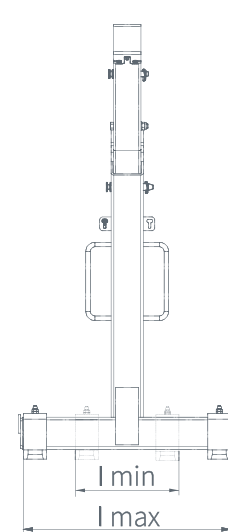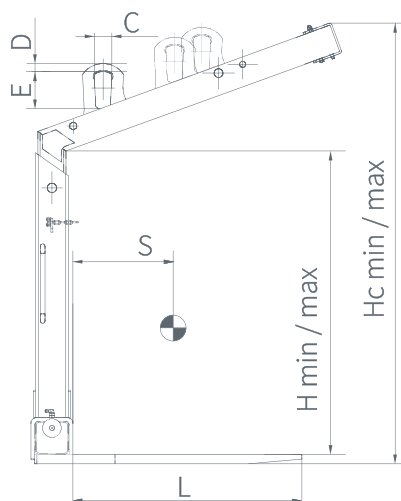

CE Declaration of conformity

2006/42/EC manufactured according to Directive

EN 13155 meets the Standard

-20 +100°C working temperature

16 000 max. working cycles

strength test 100% according to PN-EN 13155

Made in EU

30 days

CODE	WLL [kg]	H	Hc	L	C	D	E	S	I min/max	Fork cross-section	Mass [kg]
ES-A 1.0	1 000	1100 - 1600	1672 - 2172	980	60	25	130	500	450-900	90 x 30	135
ES-A 1.5	1 500	1300 - 2000	1872 - 2572	980	60	25	130	500	450-900	100 x 35	162
ES-A 2.0	2 000	1300 - 2000	1927 - 2627	980	75	35	160	500	450-900	100 x 40	220
ES-A 3.0	3 000	1300 - 2000	1947 - 2647	980	75	35	160	500	450-900	120 x 45	270
ES-A 5.0	5 000	1300 - 2000	1962 - 2662	980	100	45	200	500	450-900	140 x 60	360